TIBATEK®


Concretemaster

The concrete mixing bucket - Betonmaster can be used on wheel loaders, farm loaders, telescopic loaders, excavators (as a high or low bucket) or tractors. The corresponding adapter plates are bolted to the bucket and are therefore interchangeable.

The mixing unit is equipped with replaceable HARDOX mixing elements, which are characterized by their exceptional wear resistance. The same applies to the bucket floor, which is made of STRENX special steel.

The mixing mechanism and the outlet are hydraulically operated. Switching between the two functions is performed electrohydraulically.



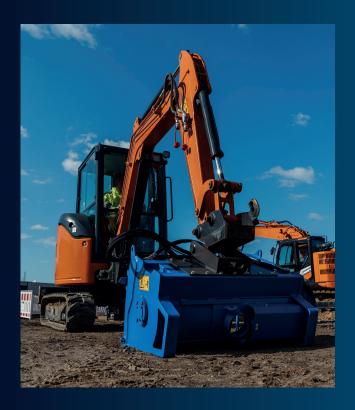



- Empty weight: 500 kg*
- Capacity: 500 I
- Suitable for excavators from: 13 t
- Suitable for wheel loaders from: 5 t

BMS 150

- Empty weight: 260 kg*
- Capacity: 150 l
- Suitable for excavators from: 3 t
- Suitable for wheel loaders from: 2 t

BMS 300

- Empty weight: 380 kg*
- Capacity: 300 l
- Suitable for excavators from: 8 t
- Suitable for wheel loaders from: 3,5 t

BMS 700

- Empty weight: 730 kg*
- Capacity: 750 l
- Suitable for excavators from: 16 t
- Suitable for wheel loaders from: 7 t



*All empty weights without adapter plate



